

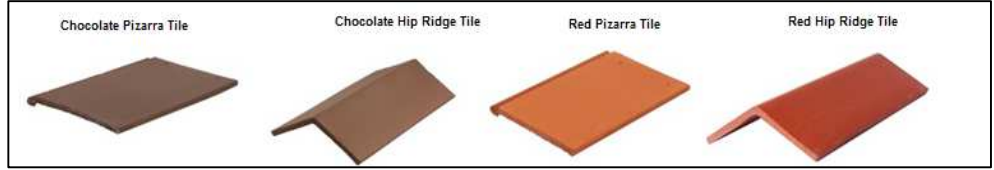


Roof Tiles

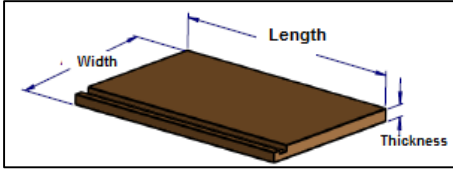

Description: Tecnigres' Roof Tiles are the result of the extrusion and firing process of natural clays at very high temperatures. This process gives endurance and wear resistance, making it ideal for the covering and adornment of different types of roofs.


Product Specification Sheet						
Name	Size (in)	Dimensions (in)	Color	Finish	Estimate untis / sq Ft/ Lft	Weight (Lb/sq ft)
Pizarra	13,39 x 8,66	Length: 13,39 ± 0,27 Width: 8,66 ± 0,17 Thickness: 0,39 ± 0,01	Red, Chocolate	Smooth	1,67 und / sq ft	Red: 6,34Lb/sq ft Chocolate: 6,54 Lb/ sq ft
Hip Ridge	15,35 x 7,87	Length: 15,35 ± 0,31 Width: 7,87 ± 0,16 Thickness: 0,39 ± 0,01	Red, Chocolate	Smooth	1 und/ft	Red: 3,5 (Lb/ ft) Chocolate: 3,62 (Lb/ ft)

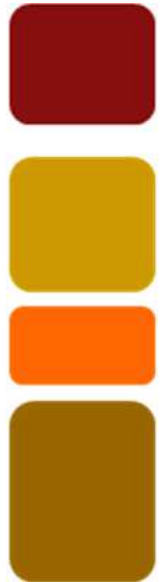

Product Technical Specifications					
Variable	Standard	Specification			
		Standard		Housegres	
		Avarage 5 Und	Individual	Avarage 5 Und	Individual
Dimensional Tolerance	ASTM C 1167	± 2%		± 2%	
Water Absortion (%)	ASTM C 1167	<10%		<10%	
Breaking Load (Lbf)	ASTM C 1167	Type I Min 404	Type I Min 360		
Recommended Use	Product designed for Roofing				

Important Notes:

- Clay extruded products may present slight variations in tone and measure, and other characteristics proper of a natural product. Therefore, we recommend to install our products with an expansion of 5/16 of an inch, and to mix the contents of several packages to achieve a better installation. (This does not apply to Roof Tiles, since each type has recommended overlap, and for pavers that are recommended to install side by side)
- We do not accept claims on installed products. If there is any inconvenience with our products, stop immediately its installation and call your supplier.
- Products specifications and design are subject to eventual changes due to manufacturer need without previous notice.
- Technical sheet contents may vary due to changes in products technical specifications.

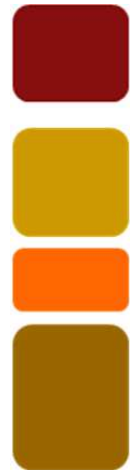

CASAGRES
Km. 25 vía Manizales Medellín Sector Tres Puertas
Teléfonos: Tel: +57 (6) 880 15 15 ext. 128- 882 0 163
Fax: +57 (6) 880 24 29
www.casagres.com.co

_____ Developed	_____ Reviewed	_____ Approved